



# GORILLA GUARD®

HIGH PERFORMANCE  
PREMIUM  
GLASS-REINFORCED  
FELT

## SHINGLE UNDERLAYMENT



### DATA SHEET

**Similar Cost Per Square to #30 Felt.**



### Gorilla Guard® Product Description

Gorilla Guard® high performance underlayment for steep slope roof applications. Made to order for the true professional. Contractors across the country told us what they wanted in a high quality underlayment. We utilized new technology to create an underlayment with high performance features that out-performs typical organic felt by adding glass fibers. You'll save time – and labor costs – by using the right product the first time.

- Meets ASTM D 6757 criteria for reinforced underlayments
- Meets performance criteria of ASTM D 4869 Type I and Type III, ASTM D 226 Type I (#15 & #30 Standard)
- Convenient four square coverage rolls; less waste and less handling
- UL Classified as roofing accessory
- Glass fiber reinforced, organic felt underlayment
- Strong/tough
- Lays flatter on deck in wet conditions
- Highly resistant to wrinkling
- Reduces the likelihood of slipping for increased safety
- Resists tear away from fasteners when walked on or in strong wind when properly installed
- Meets shingle underlayment requirements for the Atlas Signature Select® roofing system
- Better quality product than typical #30 Saturated Felt at similar cost per square
- Florida Building Code Approved - FL 11915

**UPGRADE  
THE JOB  
NOT THE  
PRICE**



Atlas offers homeowners increased coverage of their Premium Protection Period on any Atlas Signature Select® Roof System. This product qualifies for use in an Atlas Signature Select® Roofing System when used in combination with other qualifying Atlas products. For more information please visit [www.atlassignatureselect.com](http://www.atlassignatureselect.com)

[www.ATLASROOFING.com](http://www.ATLASROOFING.com)



# GORILLA GUARD®

HIGH PERFORMANCE PREMIUM GLASS-REINFORCED FELT

## SHINGLE UNDERLAYMENT



## DATA SHEET

### Installation

Gorilla Guard® shall be applied to a properly prepared dry deck that is smooth, clean and free from any depressions, projections, or protruding nails. Roof decks shall be structurally sound and meet or exceed minimum requirements of the deck manufacturer and local codes.

Always lay the Gorilla Guard® parallel to the eaves, lapping each course at least 2" over the underlying course. Apply the drip edge underneath the Gorilla Guard® along the eaves and over the Gorilla Guard® along the rakes. Gorilla Guard® should never be applied perpendicular to the eaves. Secure the Gorilla Guard® with fasteners every 12" across the lower and upper edge to hold it in place. If more than one piece is required to continue a course, lap the ends at least 4". End laps in succeeding courses should be located at least 6' from end laps in the preceding course. Lap the Gorilla Guard® a minimum of 6" from both sides over all hips, ridges and valleys. Where a roof meets a vertical surface, carry the underlayment at least 4" up the surface.

On decks having a slope greater than 4" per foot, one layer of Gorilla Guard® should be applied. Some local codes may require specific underlayments. On slopes 2" to 4"

per foot apply a double layer of Gorilla Guard® over the entire deck surface. Starting with a 19" wide strip at eaves, overhanging the eaves 1/4" to 3/8", cover with full 36" strips providing a 17" exposure. Continue with 36" strips lapping each course 19" over the preceding course. End laps for low slopes shall be 12" and staggered 6' apart.

The use of Gorilla Guard® along with the proper decking materials and shingles will help in meeting Class A and or Class C Fire ratings. A shingle by itself is not fire-rated, although it is part of the roofing assembly.


### Storage

KEEP ROLLS DRY AND COMPLETELY PROTECTED FROM THE WEATHER. If work is to be done in cold weather, rolls of roofing should be placed in a warm place for 24 hours prior to application.


**\*Tip: Cut Gorilla Guard® into manageable lengths for safety on the roof.**

### Applications

#### Steep Slope Underlayment Installation

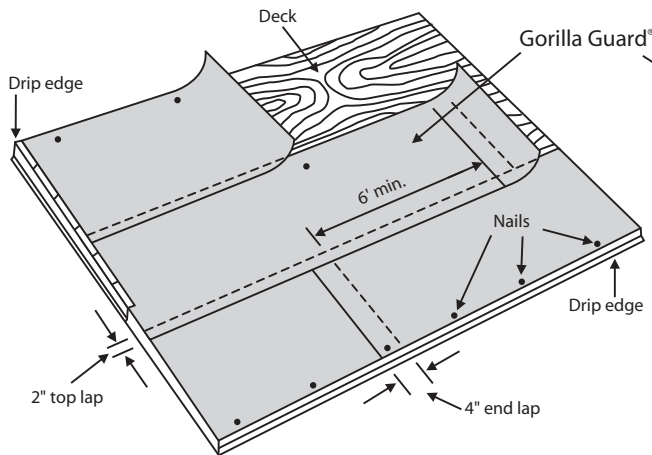

#### Low Slope Application (Double Coverage)

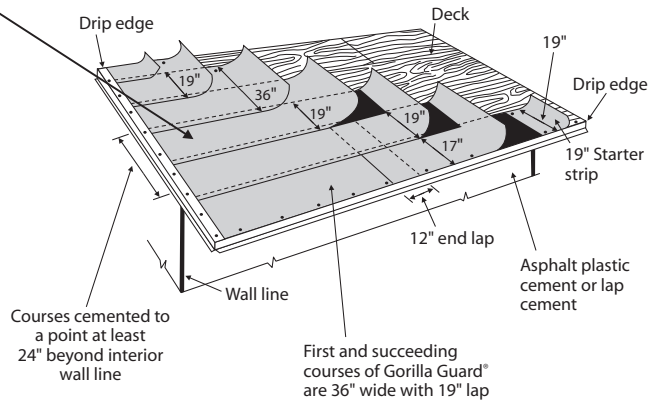

### Technical Data

Technical Data			
	Coverage w/ 2" Lap	Roll Size	Rolls Per Pallet
<b>Gorilla Guard®</b>	<b>400 sq. ft.</b>	<b>3' x 141.5'</b>	<b>36</b>

#### For more information:

**Ardmore, OK**  
2300 South Veterans Blvd.  
Ardmore, OK 73401  
Tel: (800) 261-2852  
Fax: (580) 223-6894

**Daingerfield, TX**  
1100 Georgia Pacific Drive  
Daingerfield, TX 75638  
Tel: (800) 270-2852  
Fax: (903) 645-2291

**Franklin, OH**  
675 Oxford Road  
Franklin, OH 45005  
Tel: (800) 260-2852  
Fax: (937) 746-6040

**Hampton, GA**  
100 Pine View Drive  
Hampton, GA 30228  
Tel: (800) 251-2852  
Fax: (770) 946-5249

**Meridian, MS**  
2322 Valley Road  
Meridian, MS 39302  
Tel: (800) 933-2721  
Fax: (601) 483-7344

Meets the PERFORMANCE requirements of  
ASTM D 4869 TYPE I & III, D 226 TYPE I, D 6757  
Florida Building Code Approved - FL 11915



**Corporate Sales & Marketing**  
2000 RiverEdge Parkway  
Suite 800  
Atlanta, GA 30328  
[www.ATLASROOFING.com](http://www.ATLASROOFING.com)